

MODEL NO.66524 Sand Spot

PARTS LIST

DESCRIPTION	NO. REQ'D	PART NUMBER
Bubble	1	303047
Table Panel	1	305090
Seat Panel	1	305091
Support Leg	2	305077
Hardware Complete	1	305083
3/8" Barrel Nut	12	804804*
3/8" Flat Washer	4	817410*
3/8" Lockwasher	8	817334*
3/8" x 3/4" P.B.H.C.S. w/ Patch	12	812052*

Unless Otherwise Specified, All Units of Measure are Each

** Included in Hardware*

Warning: Small parts and hardware items may present a potential choking hazard. Promptly remove all unused parts from play area. Any bolt end protruding more than two full threads beyond the face of the nut causes risk of clothing entanglement. Promptly cut-off flush, file smooth, and treat to prevent corrosion.

Note: Peen Tee-Nuts and Flatwashers to match radius of pipe after assembly is complete.

Note: Loctite (supplied by others) should be used on all threaded hardware.

SPECIFICATIONS:

Panel: High-density .750" thick extruded solid polyethylene with color molded in and UV-stabilized.

Bubble: Bubble made of yellow ABS 3/16" thickness.

Support Post: 8" x 8" x 1/8" plate stainless steel welded to 3-1/2" O.D. x 13-gauge galvanized steel tubing and polyester powder-coated after fabrication.

Hardware: Primary Hardware is Stainless steel.

Weight: 69lb / 31.4 kg.

[4623mm x 4623mm]

Minimum Area Required: 15'-2" x 15'-2"

INSTALLATION INSTRUCTIONS:

IMPORTANT: Read through all instruction steps before starting.



1. Dig footing as shown in the assembly diagram.
2. Attach Panels (B and B1) to Support Legs (A) using Bolts (D), Lockwashers (H) and Barrel Nuts (F) as shown. Attach Small Bubble (C) to Table Panel (B) using Bolts (D) with Flat Washers (E) and Barrel Nuts (F) as shown in the assembly diagram.
3. Brace in dug hole at height shown in diagram. Making sure table and seat are plumb and level. Pour concrete within 4" to the top and taper away from posts for good water drainage. Allow to cure at least 48 hours before use.
4. When the assembly is completed and satisfactory, tighten all fasteners. Also eliminate sharp points and sharp edges (burring) on installed hardware like bolts, nuts, etc. Install resilient surfacing material within the use zone of play structure in accordance with ASTM specifications F1292 appropriate for the fall height of each structure. Refer to the Safety Guidelines

MAINTENANCE PROCEDURE:


Periodically check hardware for tightness, and tighten as necessary. Always check all parts for breakage or wear, and immediately put equipment out of service until any faulty parts found are repaired or replaced. Check for rust, paint peeling and touch-up if necessary with paint. Check for welded areas and verify integrity. Check for cracks, gouges or breakage on plastic, check for integrity of the plastic, keep plastic clean of any extraneous substances, verify than any deformation does not create entrapment as specified on ASTM F 1487-98 section 6. Check periodically resilient surfacing for appropriate depth and remove extraneous materials that could cause injury, infection, or disease. Maintain detailed installation, inspection, maintenance, and repair records for each public-use playground equipment.

MODEL NO.66524 Sand Spot


FINISHED ASSEMBLY

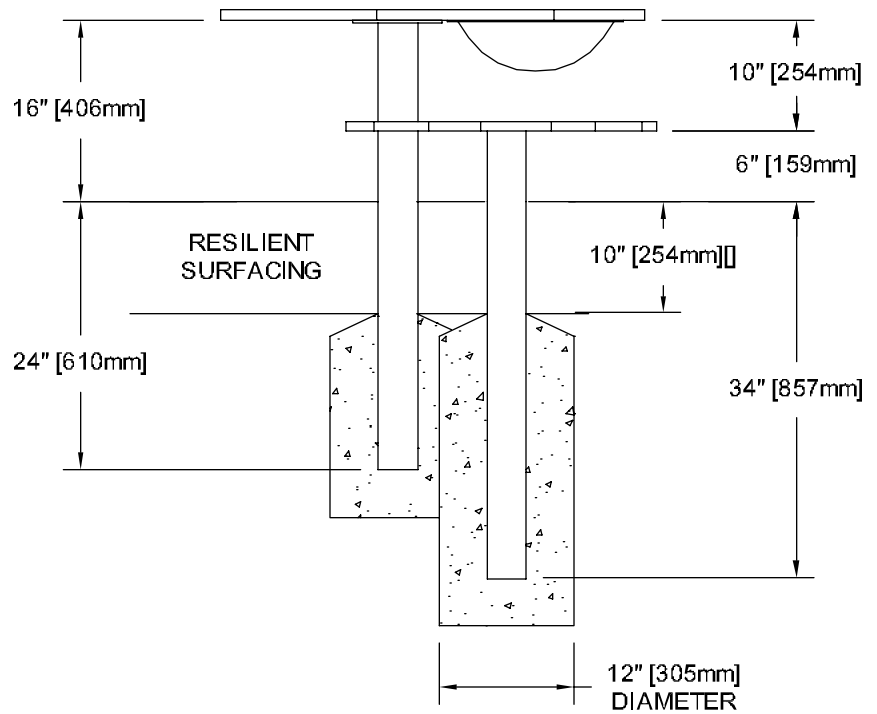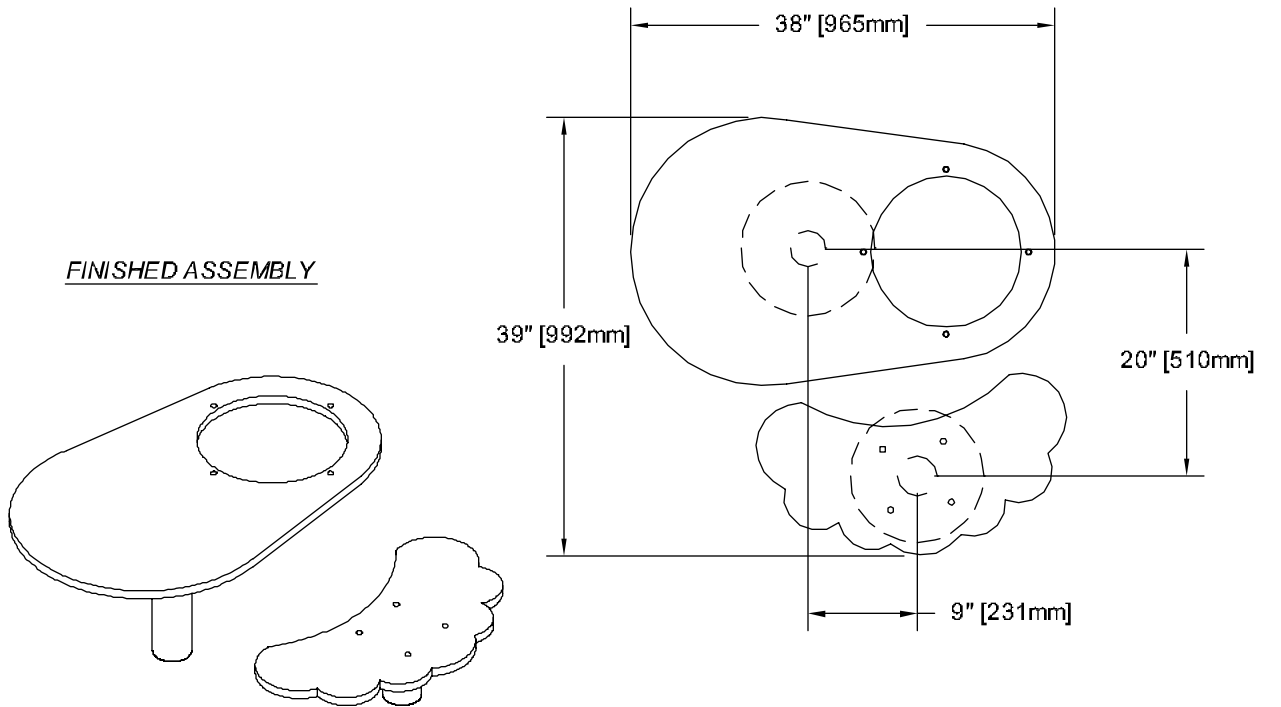

MODEL NO.66524 Sand Spot

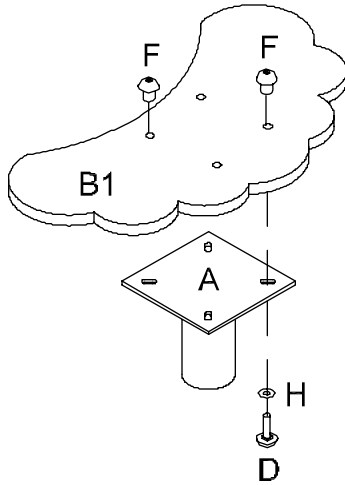

TYPICAL ASSEMBLY

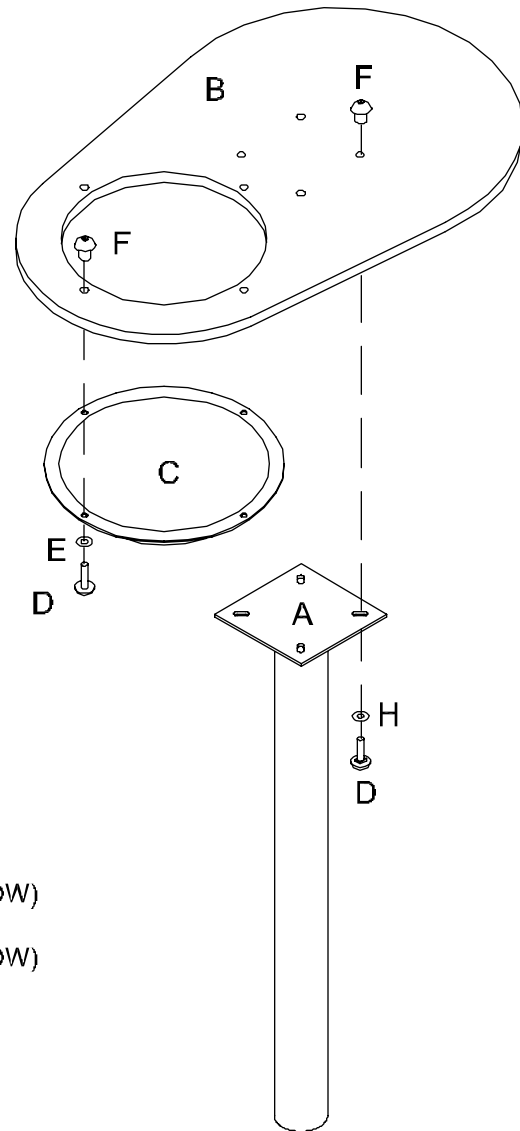

LEGEND FOR ASS'Y DWGS

- A = 3-1/2" O.D. SUPPORT LEG - 48" (RED)
- B = SAND SPOT TABLE PANEL (YELLOW)
- B1 = SAND SPOT SEAT PANEL (BLUE)
- C = BUBBLE - 16" DIA. (YELLOW)
- D = 3/8" X 3/4" HEX-PINNED BOLT
- E = 3/8" FLAT WASHER
- F = 3/8" BARREL NUT
- H = 3/8" LOCKWASHER